

## TO-JTK 型圆形预绝缘端头 Insulated Ring Terminals

**Material**  
Insulation: PVC  
Terminal Body: Copper  
Plating: Tin




电线范围 Wire range: 0.5~1.5mm<sup>2</sup> (美国线规 A.W.G. 22~16) 最大电流: I<sub>max</sub>=19A

型号规格 Item No	美制螺栓号 Stud size	尺寸Dimension(mm)						颜色 Color
		d2	B	L	F	H	D φ	
RV1.25-3.2	#4	3.2	5.7	17.8	4.95	10.0	4.3	红色 Red
RVS1.25-3.5	#6	3.7	5.7	17.8	4.95			
RVM1.25-3.5	#6	3.7	6.6	20.1	6.3			
RVL1.25-3.5	#6	3.7	8.0	21.5	7.0			
RVS1.25-4	#8	4.3	6.6	20.1	6.3			
RVL1.25-4	#8	4.3	8.0	21.5	7.0			
RVS1.25-5	#10	5.3	8.0	21.5	7.0			
RVL1.25-5	#10	5.3	9.8	23.0	8.5			
RVS1.25-6	1/4	6.4	9.8	23.0	8.5			
RV1.25-6	1/4	6.4	11.6	27.5	11.1			
RV1.25-8	5/16	8.4	11.6	27.5	11.1			
RV1.25-10	3/8	10.5	13.6	31.6	13.9			
RV1.25-12	1/2	13.0	19.2	36.0	16.5			

电线范围 Wire range: 1.5~2.5mm<sup>2</sup> (美国线规 A.W.G. 16~14) 最大电流: I<sub>max</sub>=27A

型号规格 Item No	美制螺栓号 Stud size	尺寸Dimension(mm)						颜色 Color
		d2	B	L	F	H	D φ	
RV2-3.2	#4	3.2	6.6	17.8	4.3	10.0	4.9	蓝色 Blue
RVS2-3.5	#6	3.7	6.6	17.8	4.3			
RVM2-3.5	#6	3.7	6.6	21.0	7.0			
RVL2-3.5	#6	3.7	8.5	22.5	7.75			
RVS2-4	#8	4.3	6.6	21.0	7.0			
RVL2-4	#8	4.3	8.5	22.5	7.75			
RVS2-5	#10	5.3	8.5	22.5	7.75			
RVL2-5	#10	5.3	9.5	22.5	7.25			
RV2-6	1/4	6.4	12.0	27.6	11.0			
RV2-8	5/16	8.4	12.0	27.6	11.0			
RV2-10	3/8	10.5	13.6	30.2	13.9			
RV2-12	1/2	13.0	19.2	36.5	16.5			

电线范围 Wire range: 2.5~4mm<sup>2</sup> (美国线规 A.W.G. 14~12) 最大电流: I<sub>max</sub>=37A

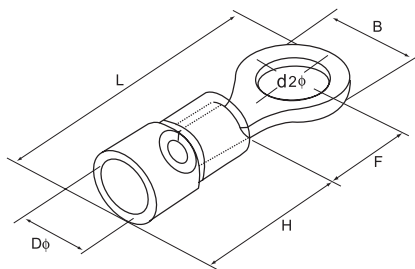

型号规格 Item No	美制螺栓号 Stud size	尺寸Dimension(mm)						颜色 Color
		d2	B	L	F	H	D φ	
RV3.5-4	#8	4.3	8.0	24.5	7.7	13.0	6.2	黑色 Black
RVS3.5-5	#10	5.3	8.0	24.5	7.7			
RVL3.5-5	#10	5.3	12.0	27.9	7.7			
RV3.5-6	1/4	6.4	12.0	27.9	7.7			
RV3.5-8	5/16	8.4	15.0	32.0	13.5			
RV3.5-10	3/8	10.5	15.0	32.0	13.5			

电线范围 Wire range: 4~6mm<sup>2</sup> (美国线规 A.W.G. 12~10) 最大电流: I<sub>max</sub>=48A

型号规格 Item No	美制螺栓号 Stud size	尺寸Dimension(mm)						颜色 Color
		d2	B	L	F	H	D φ	
RV5.5-3.5	#6	3.7	7.2	21.4	5.9	13.0	6.7	黄色 Yellow
RVS5.5-4	#8	4.3	7.2	21.4	5.9			
RVL5.5-4	#8	4.3	9.5	25.5	8.3			
RV5.5-5	#10	5.3	9.5	25.5	8.3			
RV5.5-6	1/4	6.4	12.0	31.5	13.0			
RV5.5-8	5/16	8.4	15.0	33.7	13.7			
RV5.5-10	3/8	10.5	15.0	33.7	13.7			
RV5.5-12	1/2	13.0	19.2	38.1	16.0			