



FI-S型连接器承认书图面

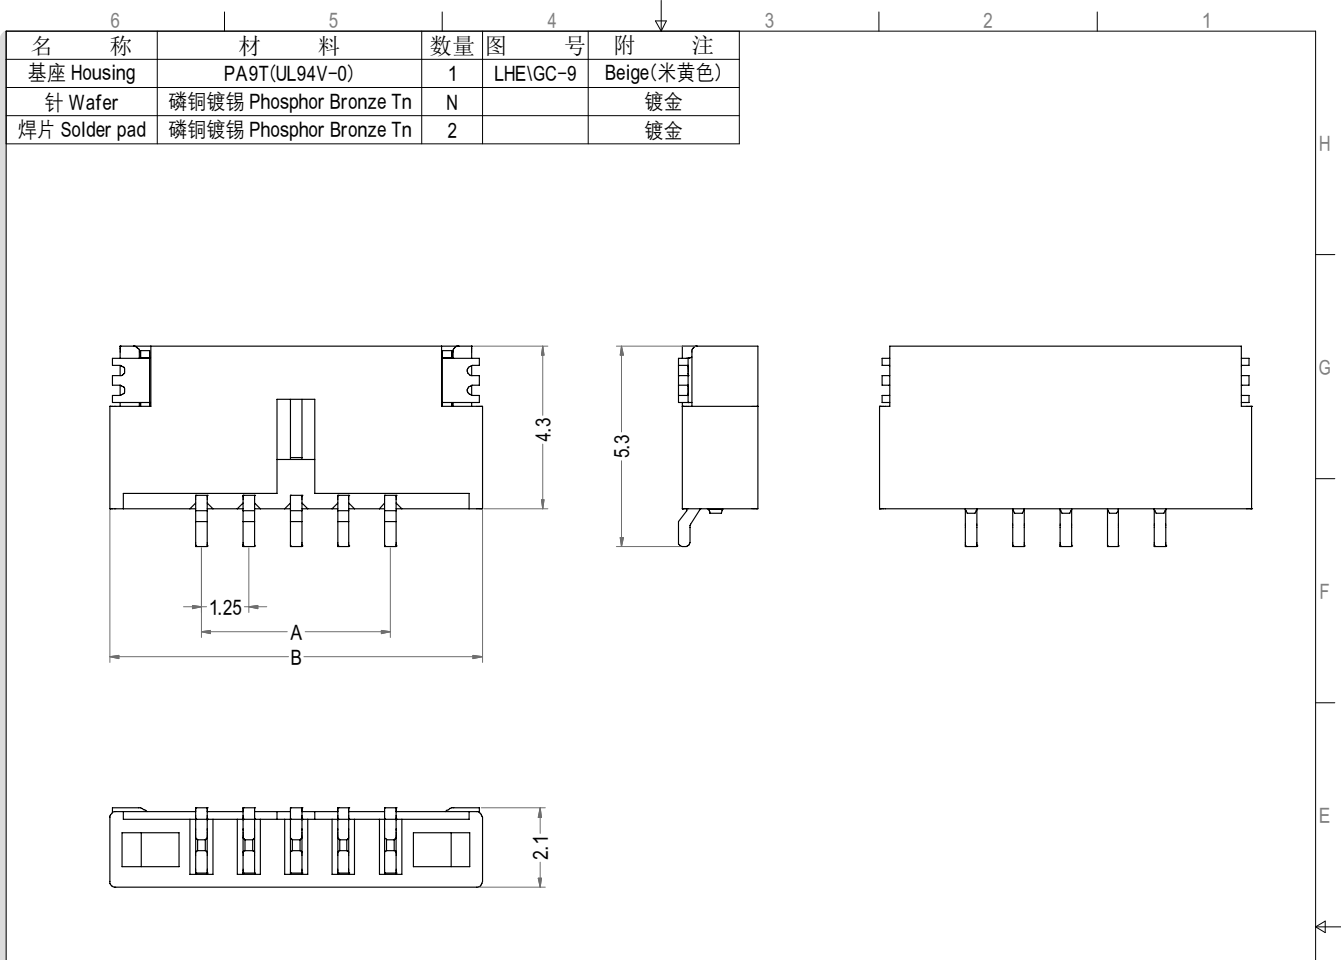

| Poles | Part No. | Description | DIM=A | DIM=B |
|-------|------------|-------------|-------|-------|
| 2 | A1255-SR02 | FI-S-2AWB | 1.25 | 6.10 |
| 3 | A1255-SR03 | FI-S-3AWB | 2.50 | 7.35 |
| 4 | A1255-SR04 | FI-S-4AWB | 3.75 | 8.60 |
| 5 | A1255-SR05 | FI-S-5AWB | 5.00 | 9.85 |
| 6 | A1255-SR06 | FI-S-6AWB | 6.25 | 11.10 |
| 7 | A1255-SR07 | FI-S-7AWB | 7.50 | 12.35 |
| 8 | A1255-SR08 | FI-S-8AWB | 8.75 | 13.60 |
| 9 | A1255-SR09 | FI-S-9AWB | 10.00 | 14.85 |
| 10 | A1255-SR10 | FI-S-10AWB | 11.25 | 16.10 |
| 11 | A1255-SR11 | FI-S-11AWB | 12.50 | 17.35 |
| 12 | A1255-SR12 | FI-S-12AWB | 13.75 | 18.60 |
| 13 | A1255-SR13 | FI-S-13AWB | 15.00 | 19.85 |
| 14 | A1255-SR14 | FI-S-14AWB | 16.25 | 21.10 |
| 15 | A1255-SR15 | FI-S-15AWB | 17.50 | 22.35 |
| 16 | A1255-SR16 | FI-S-16AWB | 18.75 | 23.60 |
| 17 | A1255-SR17 | FI-S-17AWB | 20.00 | 24.85 |
| 18 | A1255-SR18 | FI-S-18AWB | 21.25 | 26.10 |
| 19 | A1255-SR19 | FI-S-19AWB | 22.50 | 27.35 |
| 20 | A1255-SR20 | FI-S-20AWB | 23.75 | 28.60 |
| 21 | A1255-SR21 | FI-S-21AWB | 25.00 | 29.85 |
| 22 | A1255-SR22 | FI-S-22AWB | 26.25 | 31.10 |
| 23 | A1255-SR23 | FI-S-23AWB | 27.50 | 32.35 |
| 24 | A1255-SR24 | FI-S-24AWB | 28.75 | 33.60 |
| 25 | A1255-SR25 | FI-S-25AWB | 30.00 | 34.85 |
| 26 | A1255-SR26 | FI-S-26AWB | 31.25 | 36.10 |
| 27 | A1255-SR27 | FI-S-27AWB | 32.50 | 37.35 |
| 28 | A1255-SR28 | FI-S-28AWB | 33.75 | 38.60 |
| 29 | A1255-SR29 | FI-S-29AWB | 35.00 | 39.85 |
| 30 | A1255-SR30 | FI-S-30AWB | 36.25 | 41.10 |



LHE® 浙江联和电子有限公司

| | | | |
|----|---------------|----------|-------|
| 品名 | FI-S-AWB(80) | 比例 | 5:1 |
| 料号 | A1255-SR(80) | 未注公差(mm) | |
| 图号 | LHE\GC-9 | >0~3 | ±0.12 |
| 材料 | PA9T(UL94V-0) | >3~18 | ±0.15 |
| 制图 | 玉天2024-04-13 | >18~50 | ±0.3 |
| 审核 | 天琴2024-04-13 | >50~120 | ±0.5 |
| 批准 | 李育文2024-04-13 | X° | ±3° |
| 视角 | | X.X° | ±0.5° |