

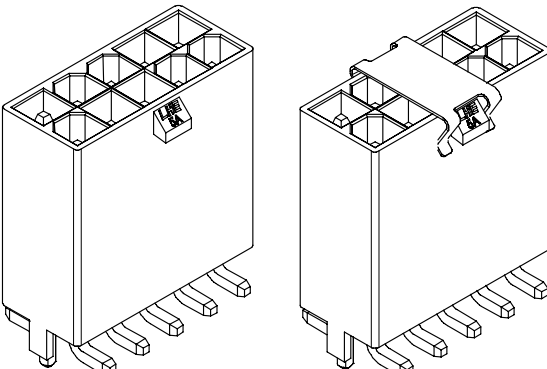
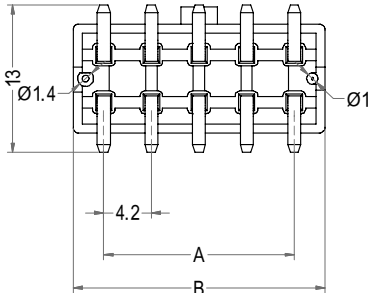
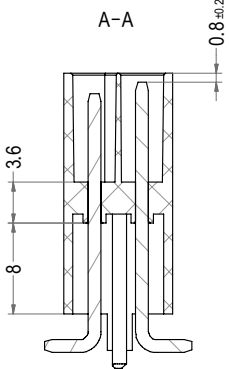



A4205型连接器承认书图面

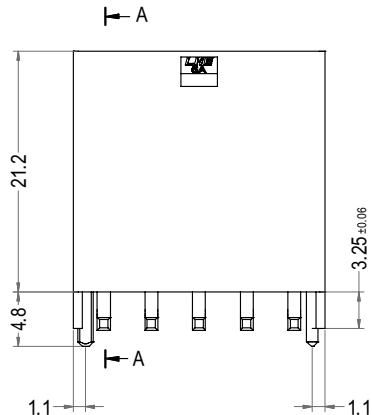

6	5	4	3	2	1
名称	材料	数量	图号	附注	
基座 Housing	Nylon 66 UL94V-0	1	LHE\GC-19		
针 Wafer	黄铜镀锡 Brass Tin	NX2			
CAP	不锈钢	1			

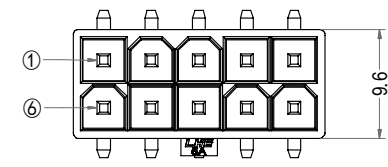

3D图示

技术要求:
1.产品要做灌胶防水
2.如图第1针为加长针,在端口对接时会优先接触,如有地线设计需求,请设计此针为地线.

Poles	Part No.	Description	DIM=A	DIM=B
4	A4205-DHSVB02X2	A4205-2X2ABDB(BH)	4.2	9.60
6	A4205-DHSVB03X2	A4205-2X3ABDB(BH)	8.4	13.80
8	A4205-DHSVB04X2	A4205-2X4ABDB(BH)	12.6	18.00
10	A4205-DHSVB05X2	A4205-2X5ABDB(BH)	16.8	22.20
12	A4205-DHSVB06X2	A4205-2X6ABDB(BH)	21	26.40
14	A4205-DHSVB07X2	A4205-2X7ABDB(BH)	25.2	30.60
16	A4205-DHSVB08X2	A4205-2X8ABDB(BH)	29.4	34.80
18	A4205-DHSVB09X2	A4205-2X9ABDB(BH)	33.6	39.00
20	A4205-DHSVB10X2	A4205-2X10ABDB(BH)	37.8	43.20
22	A4205-DHSVB11X2	A4205-2X11ABDB(BH)	42	47.40
24	A4205-DHSVB12X2	A4205-2X12ABDB(BH)	46.2	51.60

LHE® 浙江联和电子有限公司			
品名	A4205-2XNABDB(BH)	比例	3 : 2
料号	A4205-DHSVBNX2	未注公差(mm)	
图号	LHE\GC-19	>0~3	±0.12
材料	/	>3~18	±0.15
制图	石 斛 2024-03-14	>18~50	±0.3
审核	天 琴 2024-03-14	>50~120	±0.5
批准	季 育 文 2024-03-14	X°	±3°
视角		X.X°	±0.5°