

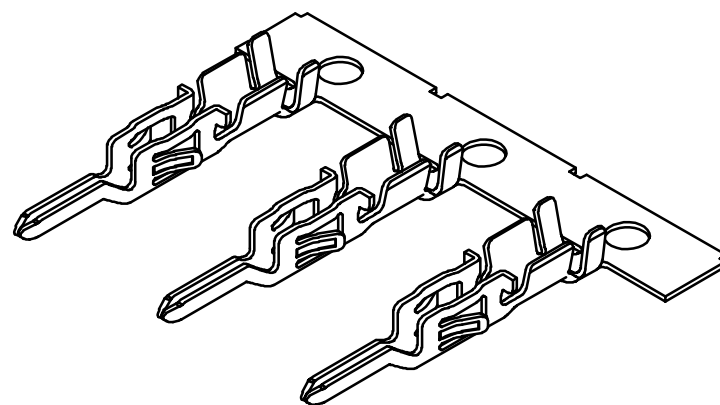




REV	SYM	REVISION RECORD	DR.	APPR.	DATE
A/0		原 始 版 本			A/0
A/1		由C3003T改为C3002-T			20171022
A/2		取消端子表面处理说明			20220402
A/3		高低温环境测试从85℃,更新到105℃,更改电流	YF		20220929

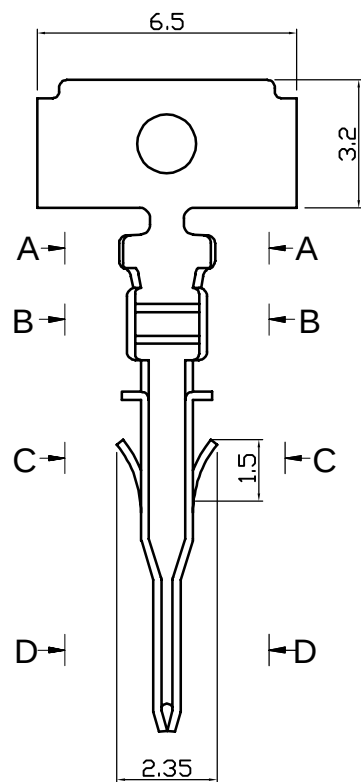

线数(poles): 2 to 12P/1×2 to 12×2P
 额定电流(Current rating): 8.5A AC,DC
 额定电压(Voltage rating): 250V AC,DC
 温度范围(Temperature range): -25°C to +105°C
 接触电阻(Contact resistance): ≤15mΩ
 绝缘电阻(Insulation resistance): ≥1000MΩ
 耐电压(Withstand voltage): 1500V AC/minute
 适用线规(Applicable wire): AWG #30 to #20
 绝缘外径(Insulation O.D): 1.2 to 1.9mm

Part No.		Material	Finish	A	B	Qty/reel
C3002-TP	MX3.0-AT11	Phosphor Bronze	TIN	1.38	1.9	10000pcs
C3002-T12P	MX3.0-AT12	Phosphor Bronze	TIN	1.50	1.9	10000pcs
C3002-T13P	MX3.0-AT13	Phosphor Bronze	TIN	1.50	2.0	10000pcs

X.°±3° X.X°±0.5° **LNE** 浙江联和电子有限公司 ZHEJIANG LIANHE ELECTRONICS CO., LTD

>0.3	>3-18	>18-50	>50-120	单位	比例	Design Units	SIZE	页码	
±0.12	±0.15	±0.3	±0.5	MM Only	——	METRIC	A4		
制作	审核	批准	材料	图号			Part No.		
			见图解	品名	MX3.0-AT				