






D280N端子承认图面

REV	SYM	REVISION RECORD	DR.	APPR.	DATE
A/0		原 始 版 本			A/0
A/1	①	由D2801-T1NB变更为D280N-TB	WZY		2016.10.04
A/2	②	新增D280N-TA25583,原基础上压线脚改小	WZY		2019.01.28
A/3		新增T128,E尺寸为1.9, 图面进行优化	SH		2023.11.07



3D-view After crimping

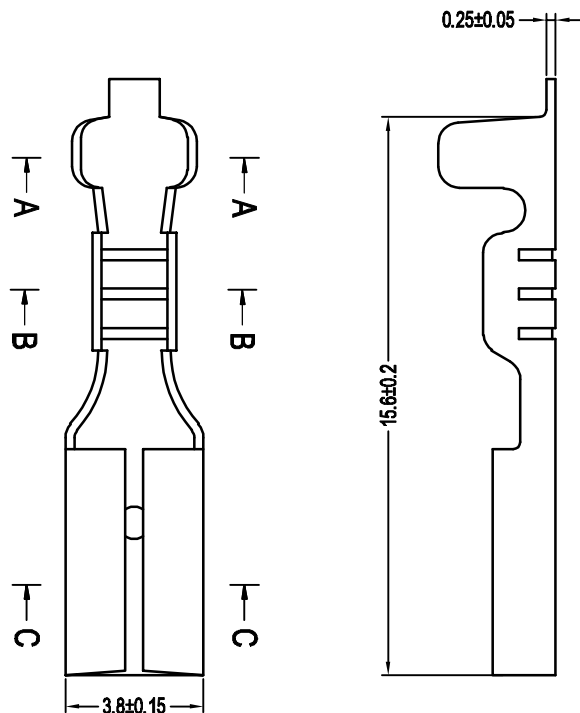

端子出料方式 Terminal discharge mode

	Part No.	A	B	C	D	E	Material	Finish	Mating tab thickness	Wire Range (AWG)	Insulation O.D(mm)	Section Area(mm ²)	Qty/ree
①	D280N-TB255B	3.5	3.15	2.05	2.3	1.8	Brass	Tin	0.5	#22 to #18	1.7~3.0	0.33~0.83	18000pcs
	D280N-T12B255B	3.5	3.15	2.05	2.3	1.9	Brass	Tin	0.5	#22 to #18	1.7~3.0	0.33~0.83	18000pcs
②	D280N-TA255B	2.7	2.8	1.65	2.0	1.8	Brass	Tin	0.5	#26 to #22	1.2~1.7	0.13~0.33	18000pcs

未注公差				LHE [®] 浙江联和电子有限公司					
X.° ±3° X.X° ±0.5°				ZHEJIANG LIANHE ELECTRONICS CO.,LTD.					
>0~3	>3~18	>18~50	>50~120	单位	比例	Design Units	SIZE	页码	
±0.12	±0.15	±0.3	±0.5	MM Only	—	METRIC	A4		
制作	审核	批准	材料	图号			Part No.		
				见图解	品名	2.8(110)直插端子			

旧底图总号	
-------	--

底图总号

签字

日期